

User Guide

DVI-7340 MultiPort 4K Fiber Optic Extender, 1x LC

DVI-7341 MultiPort 4K Fiber Optic Extender, 1x ST



TABLE OF CONTENTS

SECTION	PAGE
PRODUCT SAFETY	1
PRODUCT LIABILITY STATEMENT.....	1
1.0 INTRODUCTION	2
2.0 SPECIFICATIONS	3
3.0 PACKAGE CONTENTS.....	5
4.0 CONNECTING THE HARDWARE.....	5
5.0 OPERATING THE UNIT.....	13
6.0 TROUBLESHOOTING.....	15
7.0 LIMITED WARRANTY.....	16
8.0 REGULATORY COMPLIANCE	16

WARNING – Product Safety

1. Do not dismantle the product housing or modify the printed circuit board module as this may result in electrical shock or burn.
2. Do not attempt to service this product yourself as opening or removing the product housing may expose you to dangerous voltages or other hazards. Refer all servicing to qualified service personnel.
3. Keep this product away from liquids. Spills into the product housing may result in fire, electrical shock, or equipment damage. If liquid spills into the housing, unplug the product immediately. Have the product checked by a qualified service engineer before using it again.
4. Place the product in an even and stable location. If the product falls or is dropped, it may cause an injury and/or malfunction.
5. Avoid exposing the product to extreme temperatures or to high humidity levels as this may result in damage to the product.
6. Only use the supplied External AC Power Adapter. The use of other power adapters may cause this product to fail or may cause a fire.
7. Do not twist or exert excessive force on the ends of the connected cables as this can cause them to malfunction. Take care to ensure that all connected cables are not forced to bend more than their minimum bend radius.

Product Liability Statement

Every effort has been made to ensure that this product is free of defects. DVI Gear cannot be held liable for the use of this product or for any direct or indirect consequential damages arising from its use. It is the responsibility of the users of this product to check that it is suitable for their requirements and that it is installed correctly. DVI Gear reserves the right to revise any of its hardware and software following its policy to modify and/or improve its products where necessary or desirable. This statement does not affect the legal rights of the user in any way.

DVI Gear and DVI Gear & Design are trademarks of DVI Gear, Inc. and may not be used without the prior written permission of DVI Gear, Inc.

All third-party trademarks and copyrights are recognized. HDMI™ is a registered trademark of HDMI LLC. All other trademarks are the property of their respective holders.

© 2017 DVI Gear, Inc. All rights are reserved. No part of this manual may be reproduced or transmitted by any form or means, electronic or mechanical, including photocopying, recording or by any information storage or retrieval system, without the prior written consent of DVI Gear.



1.0 INTRODUCTION

The DVI-7340 and DVI-7341 are high-performance, cost-effective 4K Optical Extenders designed to meet and exceed even the most demanding system requirements. They support an enormous array of signal types with or without HDCP content protection, provide long-distance extension over a single fiber cable, and support ultra-high resolutions up to 4K (UHD).

Each extender set consists of an optical transmitter module that converts the AV signals into light pulses for transmission over a single strand of Multi-Mode or Single-Mode optical fiber cable. An optical receiver module converts the light pulses back to AV signals for the display as well as other downstream devices. By using fiber optic technology, these extenders can achieve much greater distances than other extension methods such as copper cables or CAT-X extenders. The DVI-7340 includes an LC fiber port, while the DVI-7341 includes a rugged locking ST connector. All these features make the DVI-7340 and DVI-7341 the ideal future-proof, cost-effective choice for systems designers and integrators who need to support high resolution HDMI / DVI signals with or without HDCP over extreme distances.

Our digital video distribution products have been serving the professional AV industry for more than fifteen (15) years. Today, DVI Gear offers a full range of high performance products, including: Scalable Uncompressed AV-over-IP Systems, Switchers, Splitters, Scalars, Up/Down/Cross-Converters, Format Converters, as well as a wide range of long-reach Digital Cables, Extenders, and Fiber Optic Transmission systems.

1.1 Features

The DVI-7340 and DVI-7341 offer several exceptional features:

- Supports HDMI v1.4 (HDCP compliant)
- Extends HDMI, Balanced or Unbalanced Audio, Ethernet (10/100Base-T), RS-232, and bidirectional IR over a single fiber optic cable
- Resolutions up to 4K (UHD): 3840x2160 /30p (4:4:4), 3840x2160 /60p (4:2:0)

- **Maximum extension distances:**

HDCP Not Supported:

9/125µ Single-Mode Fiber: > 1.2 miles (~ 2,000 m)

50/125µ OM3 Multi-Mode Fiber: > 1,000 ft. (~ 300 m)

HDCP Supported:

All Fiber Types: 1,000 ft. (~ 300 m)

- Extends signals over a single strand of LC or ST-terminated optical fiber
- 3x EDID Modes: Pass-through, Learn, and Factory Default
- Optical fiber transmission is immune to environmental signal noise
- Low RFI / EMI profile for sensitive applications
- Locking DVI and DC power connectors for added security and reliability
- Heavy-duty mounting brackets are included

2.0 SPECIFICATIONS

Performance	
Standards Compliance	DVI v1.0, HDMI v1.4, HDCP v1.4
Maximum Pixel Clock Frequency	340 MHz
Maximum Video Bit Rate	3.40 Gbps. / 10.3 Gbps. (Aggregate)
Supported Color Depth	12-bit
Supported Resolutions	Up to 4K: 3840x2160 /30p (4:4:4), 3840x2160 /60p (4:2:0)
Digital Audio Support	Embedded HDMI digital audio up to 8-channel (7.1)
Analog Audio Support	Independent balanced or unbalanced stereo audio channel
Connections	
DVI Input / DVI Output	1 ea. 24+5 DVI-D female connector
Audio Input / Audio Output	1 ea. Balanced or Unbalanced Stereo Audio on 5-Pin Phoenix connector
Optical	DVI-7340: 1 ea. LC fiber optic connector DVI-7341: 1 ea. ST fiber optic connector
Ethernet	1 ea. RJ-45 female connector
RS-232	1 ea. 3-Pin Phoenix connector
IR Input / IR Output	IR IN: 1 ea. 3.5mm stereo mini-jack IR OUT: 1 ea. 3.5mm mini-jack
Power	1 ea. Twist-locking 2.5 / 5.5 mm female connector
Control	
Rear Panel (TX Only)	EDID Mode settings on 2x DIP switches
Diagnostic LEDs	EDID Mode (TX only), Power, Fiber Link, and Hot Plug Detect
Optical	
Optical Technology	FWDM (Filter Wavelength Division Multiplexing) using 3 optical wavelengths
Optical Wavelengths / Data Rates	1310nm = 10.2 Gbps.; 1550nm = 250 Mbps.; 1490nm = 125 Mbps.
Optical Transmitter Unit	Transmitters: 1310nm and 1490nm FP Laser Diodes (Class 1 Laser) Receivers: 1490nm and 1550nm PIN Photo Diodes
Optical Receiver Unit	Transmitters: 1490nm and 1550nm FP Laser Diodes (Class 1 Laser) Receivers: 1310nm and 1490nm PIN Photo Diodes
Optical Transmitter Output Power	1310nm: -6.0 dBm (minimum) / 0.0 dBm (maximum)
Optical Transmitter Extinction Ratio	1310nm: 3.5 dBm (minimum) / 7.0 dBm (maximum)
Optical Receiver Input Sensitivity	1310nm: -14.5 dBm (minimum)
Optical Receiver Max Input Power	1310nm: 0 dBm (maximum)
Optical Link Power Budget	8.5 dB (minimum)
Cable	
Maximum Cable Length (typical)	HDCP Not Supported: 9/125µ Single-Mode Fiber: > 1.2 miles (~ 2,000 meters) 50/125µ OM3 Multi-Mode Fiber: > 1,000 ft. (~ 300 meters) HDCP Supported: All Fiber Types: 1,000 ft. (~ 300 meters)
DVI Gear Fiber Cable	OFNP, Plenum-rated – additional data and custom lengths available on request
Cable Jacket	OFNP, Plenum-rated, Black PVC Jacket
Cable Outside Diameter	0.2" (4.4 mm)

2.1 Specifications (Continued)

DDC Support	
EDID Management	Three EDID Modes are available: Pass-through (transparent), Learn (cached), Factory Default (1080p 2-Ch audio)
HDCP Support	Supports HDMI signals with or without HDCP encryption (in Pass-through EDID Mode only)
Mechanical	
Case Dimensions (H x W x D)	Without Brackets: 1.1" x 8.6" x 5.6" (26.7 mm x 218.2 mm x 141.7 mm) With Brackets: W = 10.5" (266.2 mm) DVI-7340: D = 5.6" (142.5 mm)
Weight	1.75 lbs. / 796 g (each unit)
Construction	High-impact metal enclosure with black finish
Mounting Options	Mounting Brackets, Optional 1U Full Width Rack Mount Kit (supports two units side by side)
Environmental	
Operating Temperature	32° to +122° F (0° to +50°C)
Storage Temperature	-22° to +158° F (-30° to +70°C)
Operating / Storage Humidity	5% to 80% (non-condensing); 5% to 95% (non-condensing)
Power Requirements	
Optical Transmitter / Receiver	The TX and RX units should be powered by the supplied external power adapters.
External AC Power Adapters	Model No: DVI-7207-PS Input: 100-240VAC / 50-60Hz 0.6A; Output: 5VDC, 3.0A
Maximum Power Consumption	TX Unit: 900mA (4.5 watts); RX Unit: 900mA (4.5 watts)
Regulatory Approvals	
Fiber Optic Extender Unit	FCC Class B, CE, RoHS
Laser	US-FDA CDRH Class 1
External AC Power Adapters	FCC, CE, UL, C-UL, CEC, PSE, GS, RoHS, RCM & WEEE
Warranty	
Limited Warranty	3 Years Parts and Labor
Model Numbers	
DVI-7340 (DVI-7340-TX / DVI-7340-RX)	MultiPort 4K Fiber Optic Transmitter / Receiver, 1x LC
DVI-7341 (DVI-7341-TX / DVI-7341-RX)	MultiPort 4K Fiber Optic Transmitter / Receiver, 1x ST
DVI-CUST-OPT	Custom Fiber Optic Cable, Plenum-rated Specify: Length, Fiber Type (MMF, SMF) and Connector (LC or ST)
Accessories Included ⁽²⁻¹⁾	
<ul style="list-style-type: none"> 1x External AC Power Adapter (DVI-7207-PS) with USA plug per unit 1x User Guide 1x 5-Pin Phoenix Connector (Phoenix p.n. 1840395) 1x 3-Pin Phoenix Connector (Phoenix p.n. 1840379) 1x IR TX (DVI-7360-IR-TX) included with TX Unit 1x IR RX (DVI-7361-IR-RX) included with RX Unit 2x Mounting Brackets with Screws 4x Rack Mounting Screws 	Optional Accessories
	<ul style="list-style-type: none"> External AC Power Adapter (p.n. DVI-7207-PS) with Euro, UK, or Australia plugs +5 VDC Power Distribution Unit (p.n. DVI-7525-PDU) 19" Rack Mount Kit (p.n. DN-100-RMK) HDMI Female to DVI-D Male Adapter Cable (p.n. DVI-8410a) Custom Optical Cables (contact DVIgear for details)

Note 2-1: The Transmitter and Receiver Units are sold separately.
The accessories shown here are included per unit.

3.0 PACKAGE CONTENTS



Before attempting to use this unit, please check the packaging and make certain the following items are contained in each shipping carton:⁽³⁻¹⁾

- 1x Transmitter or Receiver Unit
- 1x User Guide
- 1x External AC Power Adapter (+5 VDC)
- 1x 5-pin 3.5mm Pitch Phoenix Connector (Phoenix p.n. 1840395)
- 1x 3-pin 3.5mm Pitch Phoenix Connector (Phoenix p.n. 1840379)
- 1x IR Transmitter (with TX Unit) or IR Receiver (with RX Unit)
- 2x Mounting Brackets with Screws
- 4x Rack Mounting Screws

Note 3-1: *The Transmitter Unit and the Receiver Unit are sold individually. Please retain the original packing material should the need ever arise to return the unit. If you find any items are missing, contact your reseller or DVIgear immediately. Please have the Model Number, Serial Number, and Invoice Number available for reference when you call.*


4.0 CONNECTING THE HARDWARE

An extension set consists of a Transmitter Unit and a Receiver Unit. Please see the following photos for information on the connections and controls.

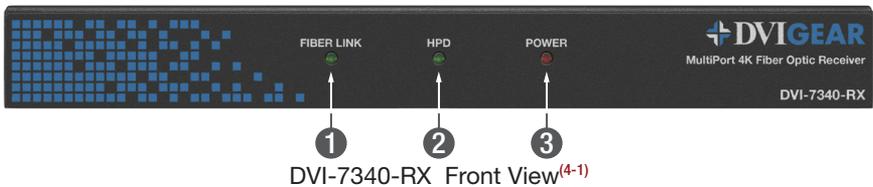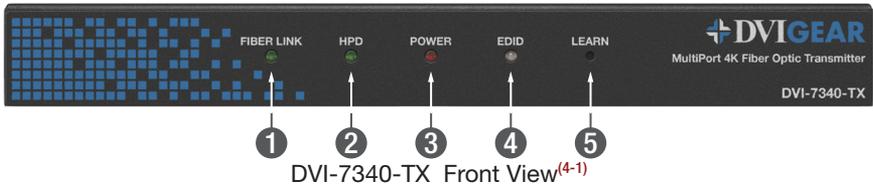


- 1 **Fiber Link:** LED lights green whenever a fiber link is present.
- 2 **Hot Plug Detect (HPD) LED:** Lights green on both the TX and RX when a Monitor is connected to the RX and a fiber link is present.
- 3 **Power LED:** Lights red when power is applied.
- 4 **EDID LED (TX Only):** See section 5.0 for details on this LED.
- 5 **EDID Learn Button (TX Only):** See section 5.1 for details on learning an EDID.

Note 4-1: *The DVI-7340 and DVI-7341 have the same form factor with the exception of the fiber optic connectors. The DVI-7340 uses LC connectors, while the DVI-7341 uses ST connectors.*

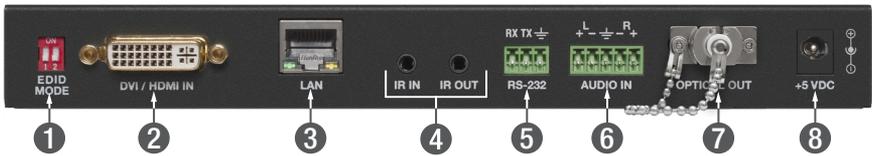


DVI-7340-TX Rear View⁽⁴⁻¹⁾

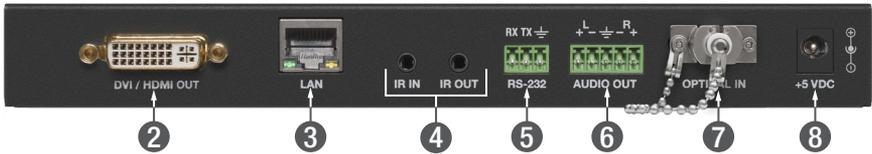

DVI-7340-RX Rear View⁽⁴⁻¹⁾

- 1 EDID DIP Switch (TX):** See Section 5.0 for details on settings.
- 2 DVI / HDMI Input (TX):** Connect to a DVI (or HDMI using an adapter cable) source.
- 2 DVI / HDMI Output (RX):** Connect to a DVI (or HDMI using an adapter cable) display.
- 3 LAN Ethernet Port:** Extends 10/100Base-T network connectivity over the fiber link.
- 4 Infrared (IR) IN:** Connect an IR receiver to accept and send IR signals over the fiber link. See Section 4.2 for further details.
- 4 Infrared (IR) OUT:** Connect an IR transmitter to receive IR signals over the fiber link and output them to a peripheral device. See Section 4.2 for further details.
- 5 RS-232:** 3-pin female Phoenix Connector for serial data pass-through.
- 6 Audio Input (TX):** Connect a 5-pin female Phoenix Connector for balanced or unbalanced audio input. See Section 4.2 for further details.
- 6 Audio Output (RX):** Connect a 5-pin female Phoenix Connector for balanced or unbalanced audio output. See Section 4.2 for further details.
- 7 Optical Output Connector (TX):** Connect a Single-Mode or Multi-Mode Fiber Optic Cable. The DVI-7340 uses LC optical connectors. The DVI-7341 uses ST optical connectors.
- 7 Optical Input Connector (RX):** Connect a Single-Mode or Multi-Mode Fiber Optic Cable. The DVI-7340 uses LC optical connectors. The DVI-7341 uses ST optical connectors.
- 8 +5 VDC Power Input:** Locking female connector for AC Power Adapter.

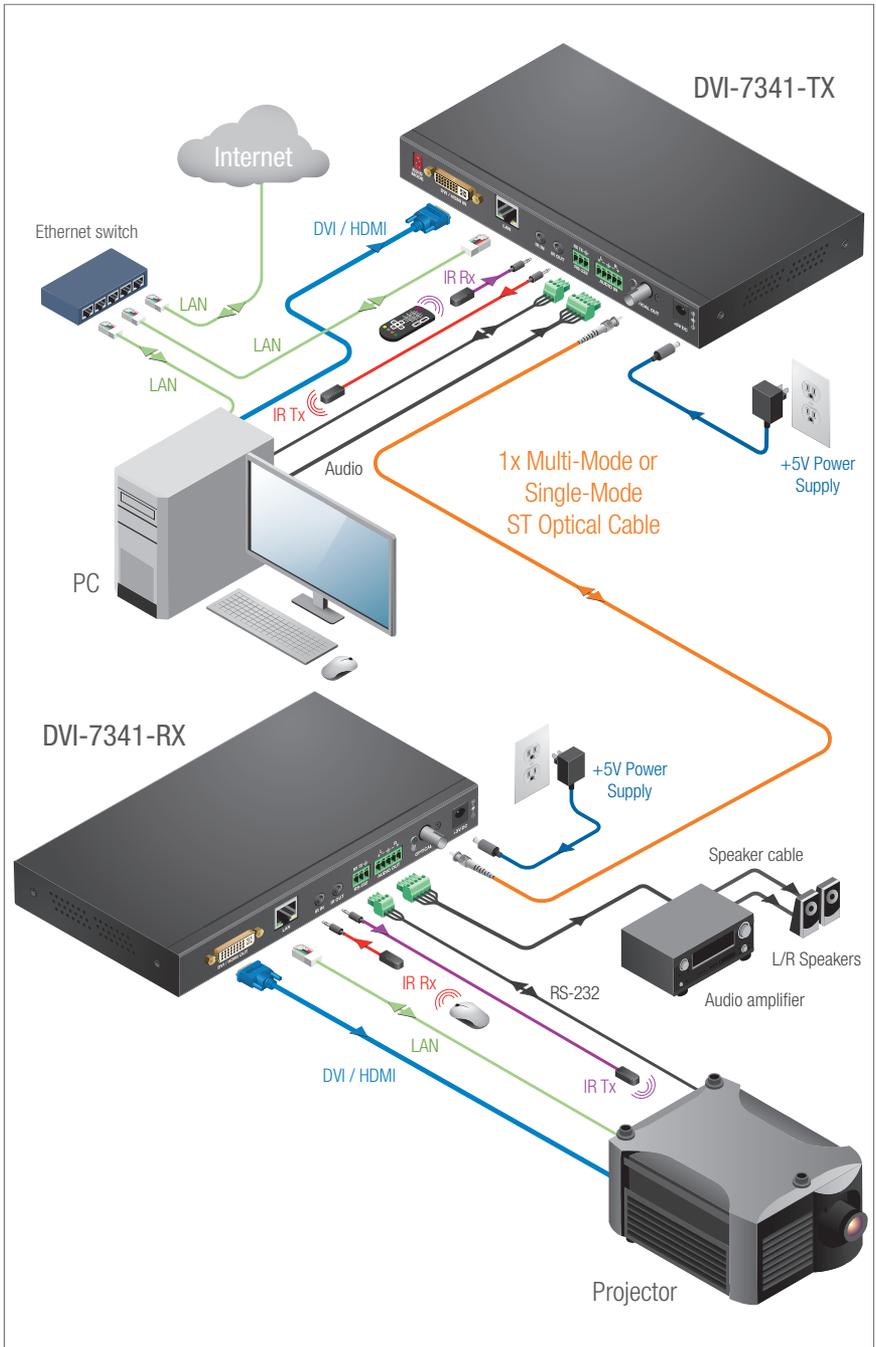



4.1 Installation Instructions


1. Mount the Transmitter and Receiver Units as needed using the provided Mounting Brackets or the optional Rack Mount Kit (DN-100-RMK). See section 4.3 for more information.
2. Set the Transmitter Unit to one of the three (3) EDID modes provided. See section 5.0 for details.
3. Connect the Transmitter to the HDMI or DVI output port of the signal source (e.g. PC). The fiber optic extenders include a locking DVI connector for added security. To connect an HDMI source to the extender, please use an HDMI to DVI cable or an HDMI to DVI adapter (DVI Gear p.n. DVI-8410a).
4. Connect the Receiver Unit to the HDMI or DVI input port of a destination device (e.g. digital display). To connect the units to an HDMI destination, please use a DVI to HDMI cable or a DVI to HDMI adapter (DVI Gear p.n. DVI-8511b).
5. Connect a strand of Multi-Mode (MMF) or Single-Mode (SMF)⁽⁴⁻²⁾ fiber optic cable between the Transmitter and Receiver Units. For the DVI-7340, use an LC-terminated fiber optic cable and insert the connectors until the tabs click in place. For the DVI-7341, use an ST-terminated fiber optic cable. Align the notch on the ST connector with the slot on the units, push in and turn clockwise to lock the connector in place.
6. Connect any other peripheral devices to the units (see section 4.2).
7. Connect the supplied External AC Power Adapters to the locking power input plugs on the Receiver and Transmitter Units. Take care to insert, then twist the connector a quarter turn in the clockwise direction to lock it in place. There is no power switch on these units. The units will turn ON as soon as the AC Power Adapter is connected to a live AC power receptacle. In the event of a power failure, the EDID files stored in the TX will not be affected as they are stored in non-volatile memory. Use only the supplied power adapters to avoid the possibility of equipment damage.
8. Apply power to the display device, then apply power to the source device. A picture should appear on the display within a few seconds. Apply power to any peripheral devices.

Note 4-2: While the DVI-7340 and DVI-7341 support the use of **Single Mode Fiber (SMF)**, extra care is required due to the smaller aperture of SMF (8.9 microns) versus 50-60 microns for **Multi-Mode Fiber (MMF)**. This smaller aperture means that SMF has an increased risk of optical contamination due to dirt, dust, oils, etc. DVI Gear recommends using **Multi-Mode Fiber (MMF)** for any and all applications that are NOT fixed installations.

4.2 Optional Connections

In addition to the video signal, both the DVI-7340 and DVI-7341 support extension of other signal types over the fiber link. These pass-through connections can be used to provide communications with other devices in the system. These connections include Balanced (or Unbalanced) Audio, 10/100Base-T Ethernet, bidirectional IR, and RS-232.

Balanced (or Unbalanced Audio)

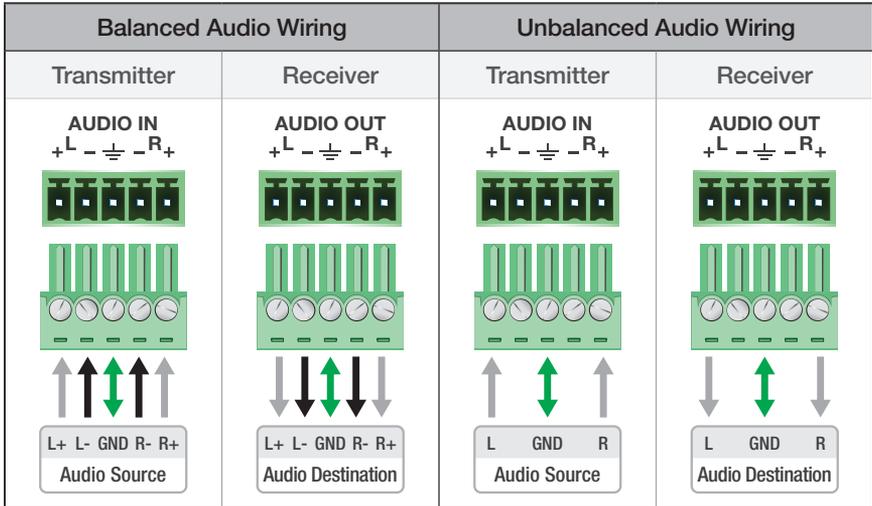


Note 4-3 – WARNING: DVI Gear strongly recommends that only qualified technical personnel be permitted to wire the Phoenix connectors. Improper wiring technique can cause equipment damage. Additionally, it is important to use stranded wires and avoid tinning the wire ends as this can allow them to be too easily removed from their Phoenix receptacles.

LAN Ethernet RJ45 port

Connect to the LAN port of a peripheral device to provide a 10/100Base-T connection via the fiber link.

IR Connections

Each extender set supports bidirectional IR communications. The Transmitter and Receiver Units each have two IR ports on the rear panel, labeled “IR IN” and “IR OUT”. To set up the IR data pathway, connect an IR receiver device (1x is included) to an “IR IN” port on one unit. Next, connect an IR transmitter to the “IR OUT” port of the other unit. Any IR communications directed to the IR receiver module on one end of the extender set will be sent out of the IR transmitter module at the other end. For bidirectional communication, an additional IR TX and RX (purchased separately) may be connected. This allows IR data to be sent upstream, downstream, or both.

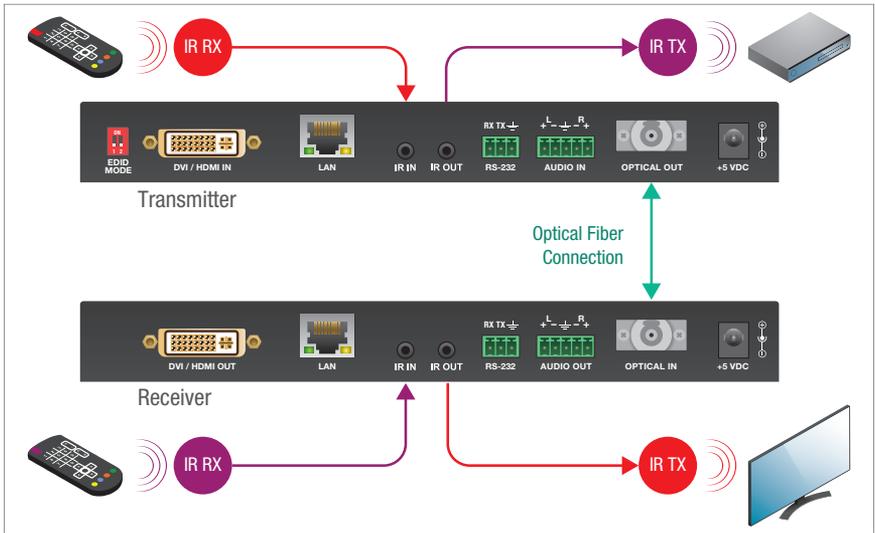


IR Receiver	IR Transmitter
<p>Pin Assignments</p>	<p>Pin Assignments</p>


Note 4-4: For best results, it is critical to carefully position the IR Transmitter and IR Receiver modules. The IR RX module should be placed where the user would typically aim the remote control. The IR TX module should be placed in close proximity to the IR window of the device being controlled. The IR TX module includes double-sided tape that can be used to adhere it in place.

RS-232 Connections

Connect to an RS-232 device to allow serial communication to pass-through. Please refer to *Warning 4-3 (on page 9)* regarding wiring technique.

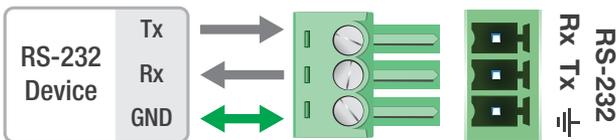


4.3 Mounting Hardware

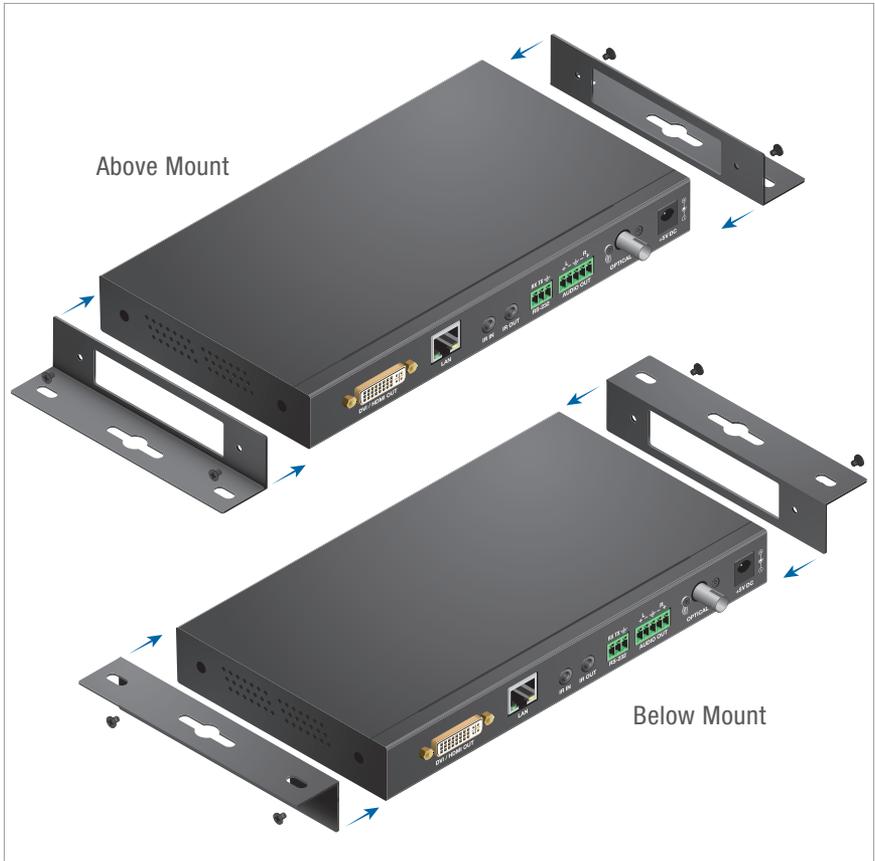

Each Transmitter and Receiver Unit comes with a pair of Mounting Brackets to facilitate installation on furniture or other surfaces. These Mounting Brackets are reversible, so the unit may be installed above or below the mounting surface. To affix each bracket to an extender unit, first remove the screws in the sides of the unit and set them aside. Next, place the side of the bracket with the large rectangular ventilation opening against the side of the unit. Use the screws to secure the bracket to the two mounting holes located on each side of the extender units. The units are shipped with the brackets installed in the “above mount” configuration.

The extender units may also be attached to an optional Rack Mount Kit (DVI Gear p.n. DN-100-RMK). Place the units into the desired location on the DN-100-RMK. Note that there are three (3) locations available: Front, Middle, and Rear. Two units may be mounted side-by-side and either forward-facing or rear-facing. Use the included 6mm long Phillips flat head screws⁽⁴⁻⁵⁾ to secure the units to the Rack Mount Kit. See the drawing below.

Note 4-5 - WARNING: When mounting the units to the DN-100-RMK, it is important to use the 6mm long screws included with the DVI-7340 / DVI-7341 units. Using other screws of greater length could damage the units.

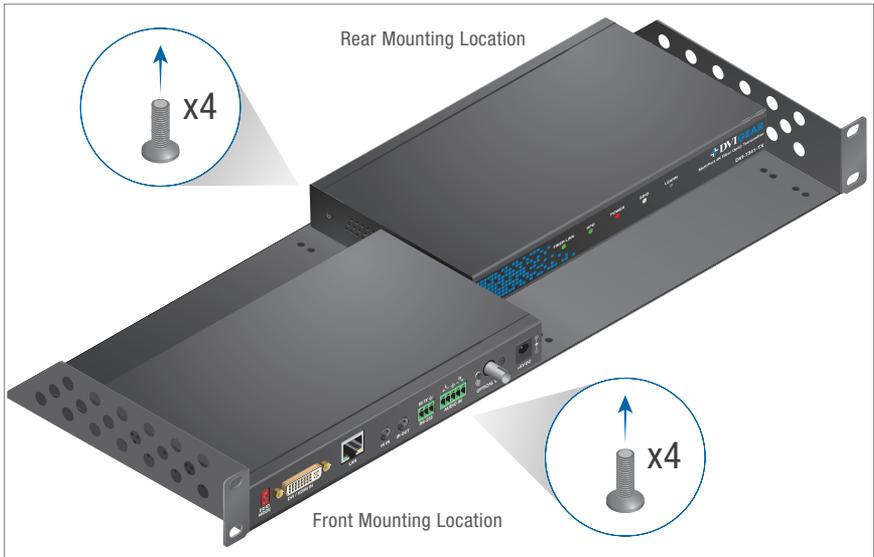

5.0 OPERATING THE UNIT

Most of the functions of these extenders are done automatically; however, the units do include 3x EDID modes that can be used to optimize system performance.

EDID (Extended Display Identification Data) is a small data file stored in virtually every TV, monitor and display device made over the last twenty years. This file contains information about the display’s capabilities, such as its supported resolutions, refresh rates, color space, type of display, manufacturer, serial number, etc. After connecting a display to a source device, the source reads and saves the EDID in order to determine the most suitable display parameters (e.g. resolution and refresh rate). In this way, EDID plays an essential role in the modern “Plug & Play” user experience.

The DVI-7340 and DVI-7341 have three (3) EDID operation modes.

EDID Mode	DIP Switch Configuration	EDID LED Status	Description
Factory Default ⁽⁵⁻¹⁾			Use the factory default EDID permanently stored in the transmitter. The factory default EDID has a preferred timing of 1920x1080 /60p resolution with 2-channel PCM audio.
Learn ⁽⁵⁻¹⁾			Learn the EDID from the connected display to an internal memory slot in the transmitter. See section 5.1 for instructions on learning an EDID.
Pass-through ⁽⁵⁻¹⁾			Pass-through EDID communication. In this mode, it is possible to support live DDC and HDCP communications.

Note 5-1: *Pass-through EDID mode is the only mode that supports live DDC and HDCP communications. When the extender is set to factory default EDID or EDID Learn mode, it is not possible to support DDC or HDCP communications. The extender can be set to different EDID modes by using the DIP switches on the rear of the Transmitter Unit. The EDID LED on the front panel of the TX Unit will change based on the current mode being used.*



5.1 Learning an EDID

1. Set the EDID switch on the Transmitter to the EDID Learn mode (see the table in section 5.0).
2. Connect the DVI / HDMI input on the Transmitter to the DVI or HDMI input port on the display using a short, high quality cable.
3. First, supply power to the display. Next, supply power to the Transmitter. The EDID LED on the front panel of the Transmitter should light up red. Now, using a stylus type device (not included), press and hold the EDID button on the front panel of the Transmitter for about 2 seconds and then release.
4. If the EDID has been successfully learned, the EDID LED should change from red to green and then back to red again. The saved EDID file will be stored in non-volatile memory. If the EDID learning process fails, then the EDID LED will flash 5 times. In this case, repeat steps 1-4 above. Contact technical support if further assistance is required.
5. Finally, disconnect the Transmitter from the display. Continue with system setup as described in section 4.1.



6.0 TROUBLESHOOTING

If the system fails to display a signal, power OFF all devices and check that the following connections are properly installed:

- Ensure the Transmitter Unit is connected to the source and the Receiver Unit is connected to the Display.
- The fiber optic cable must be connected on both the Transmitter Unit and Receiver Unit. Check to ensure that the optical cable is fully inserted into the ports. Note that slight pressure on fiber optic cable and/or connector should NOT have any influence on the image quality of the signal.
- The supplied External AC Power Adapters should be connected to both the Transmitter and Receiver Units.

Once all connections have been verified, power ON the display first, and then the DVI (or HDMI) signal source.

If there is no picture or there are intermittent picture issues, please check whether the Fiber Link LED's are lit. If the Fiber Link LED's are lit up, then there may be an EDID issue. Please check to be sure the appropriate EDID mode is being used. See section 5.0 for information on setting the EDID mode of the extender.

If the Fiber Link LED's are not lit, then it may be necessary to check the quality and/or condition of the fiber optic cable being used. Fiber optic ports and cables are very sensitive to dust, dirt and oil from handling. Even minute amounts can interfere or disrupt the optical transmission of the video signals. If erratic performance or disruption is noted, it may be necessary to have qualified technical personnel clean the optical ports and/or cable fibers using appropriate procedures and cleaning materials.⁽⁶⁻¹⁾

Note 6-1: While the DVI-7340 and DVI-7341 support the use of **Single Mode Fiber (SMF)**, extra care is required due to the smaller aperture of SMF (8.9 microns) versus 50-60 microns for **Multi-Mode Fiber (MMF)**. This smaller aperture means that SMF has an increased risk of optical contamination due to dirt, dust, oils, etc. DVI Gear recommends using **Multi-Mode Fiber (MMF)** for any and all applications that are NOT fixed installations.

If the system still fails to display an image, check to ensure that the HDMI signal source is compatible with the display by making a direct connection between the two so as to bypass the Fiber Optic Extender. If there is still no image, then there is a compatibility issue between the source and the display that must be resolved.

If the problem persists after trying the above suggestions, please contact your dealer for additional assistance. If the dealer's technical personnel are unable to assist you, please contact DVI Gear via telephone at 1.888.463.9927 (toll-free for United States and Canada) or 1.770.421.6699. You may contact DVI Gear by e-mail at support@dvigear.com.



7.0 LIMITED WARRANTY

LIMITED WARRANTY – Subject to the limitations stated below, DVI Gear warrants that this product will be free from defects in materials and workmanship for a period of three (3) years from the date of purchase.

Should the product, in DVI Gear's opinion, prove defective within the warranty period stated above, DVI Gear, at its option, will repair or replace this product without charge. Any defective parts replaced become the property of DVI Gear. This warranty does not apply to products that have been damaged due to accident, unauthorized alterations, improper repair, modifications, inadequate maintenance and care, or use in any manner for which the product was not intended.

If repairs are necessary under this warranty policy, the original purchaser must obtain a Return Authorization Number from DVI Gear and return the product freight prepaid to a location designated by DVI Gear. After repairs are complete, the product will be returned, freight prepaid.

The foregoing warranty is the sole and exclusive warranty given by DVI Gear, express or implied, and DVI Gear disclaims all implied warranties, including but not limited to implied warranties of merchantability or fitness for a particular use.

LIMITATIONS – The liability of DVI Gear with respect to any defective products will be limited to the repair or replacement of such products. In no event shall DVI Gear be responsible or liable for any damage arising from the use of such defective products, including but not limited to loss of use, revenue or profit, whether such damages are direct, indirect, consequential or otherwise and whether such damages are incurred by the reseller, end user, or any third party.

8.0 REGULATORY COMPLIANCE

This product is compliant with appropriate FCC Class B, CE, RoHS rules and regulations. The supplied AC Power Adapters are compliant with FCC, CE, UL, C-UL, CEC, PSE, GS, RoHS, RCM & WEEE rules and regulations.



Your Digital Connectivity Experts

Toll Free 888.463.9927
Phone 770.421.6699
Fax 770.234.4207

DVIGear, Inc.
1059 Triad Court, Suite 8
Marietta, Georgia 30062-2258

www.dvigeear.com